



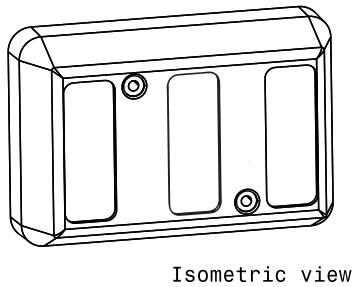

EMERGENCY LIGHTS

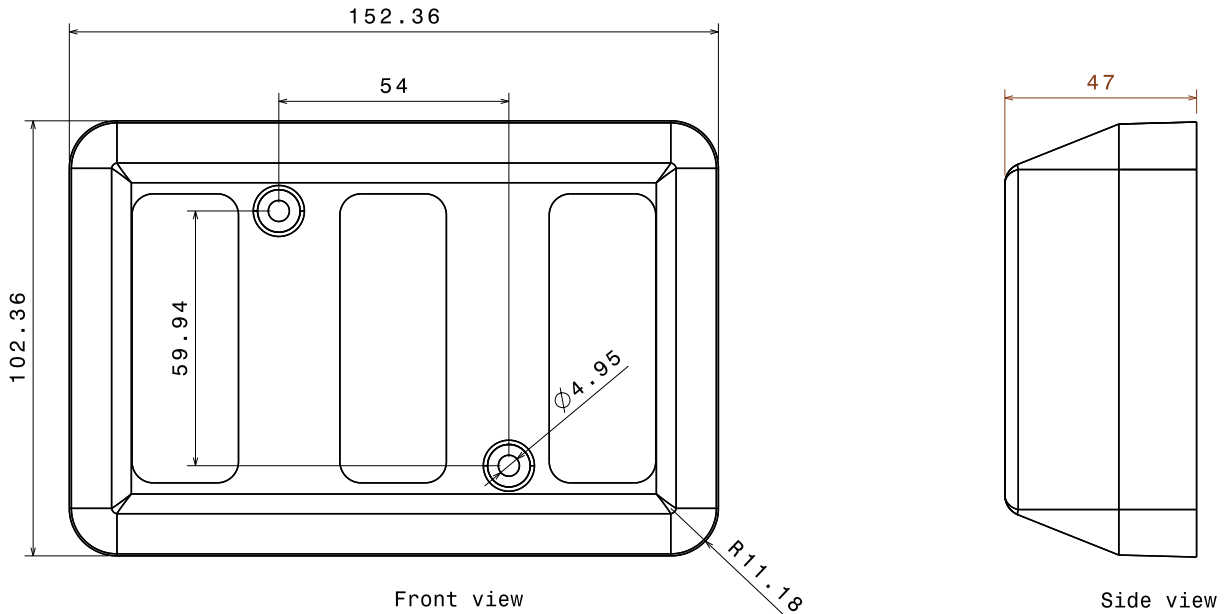

WIRING INSTRUCTIONS FOR AVEL01
 RED TO POSITIVE SUPPLY
 BLACK TO EARTH
 YELLOW TO SYNCHRONISE WITH OTHER DEVICES*

*Not all units synchronise – please ask your distributor for further details.

SPECIFICATION

1. RATED VOLTAGE 12-24V
2. WORKING VOLTAGE RANGE 12V THROUGH 24V
3. RATED CURRENT 450 MA
4. MODULATION 70 PER MINUTE
5. OVERVOLTAGE AND SURGE PROTECTED
6. REVERSE POLARITY PROTECTED
7. FULLY ENCAPSULATED WATERPROOF TO IP67
8. ALL DIMENSIONS ARE IN MILLIMETRES
9. CASE MATERIAL ABS/ACRYLIC LENS
10. OPERATING TEMPERATURE -40° TO +50°
11. CABLE LENGTH 330MM

WIRING INSTRUCTIONS FOR AVEL01SP
 TYCO SUPERSEAL FEMALE CONNECTOR

DRAWING NO: AVEL01 AVEL01SP
CUSTOMER PART NO:
CUSTOMER:
AMBER VALLEY DEVELOPMENTS LLP